




Canvas Office Landscape® External Direct Connect Power Entry Installation and Disassembly for Recycling Instructions

Parts Included:

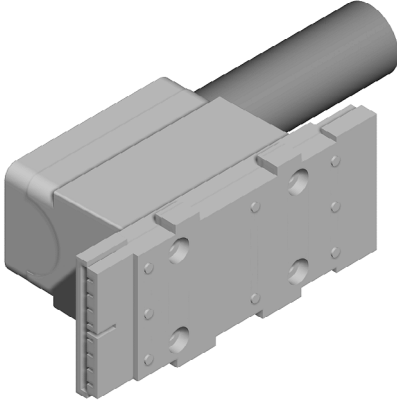

A Power Entry Harness

Tools Required:



#2 Phillips Bit



Safety Glass



WARNING

Risk of fire or electrical shock. This office furnishing system may be connected to more than one source of supply. All sources must be disconnected prior to any servicing. No single circuit may be powered by more than one source.

NOTICE

All electrical connections to building electrical sources must be made by a qualified electrician according to national, state and local electrical codes.

IMPORTANT: Save these instructions for layout changes.

HermanMiller


Part no. 1b2ghf rev E.

© 2017 Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.
© Herman Miller and Canvas Office Landscape are among the registered trademarks of Herman Miller, Inc.


Illustrations and specifications are based on the latest product information available at the time of publication.
The right is reserved to make changes in design and specifications at any time, without notice, and also to discontinue products.

WIRING DIAGRAM





SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 120/208-V, 3-PH WYE, 60-HZ 20 AMP MULTIWIRED BRANCH CIRCUIT.

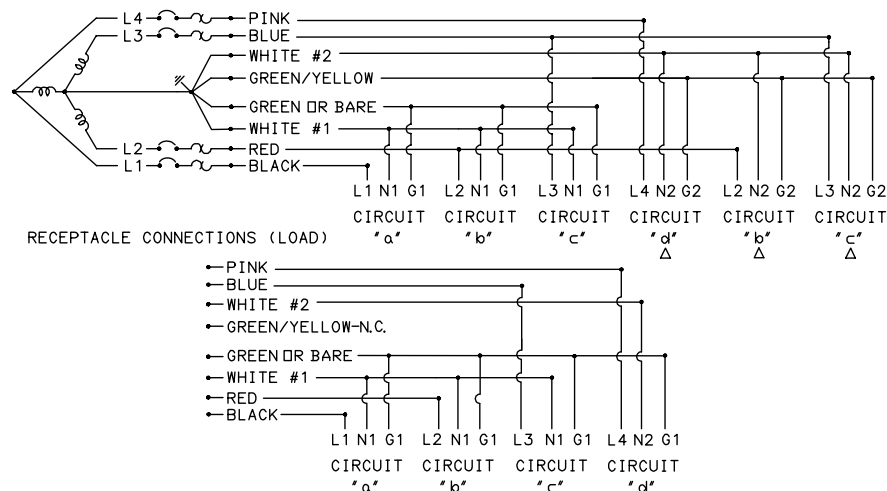

SYSTEM IS RATED FOR CONNECTION TO A GROUNDED 120/240-V, 1-PH 60-HZ 20 AMP MULTIWIRED BRANCH CIRCUIT.

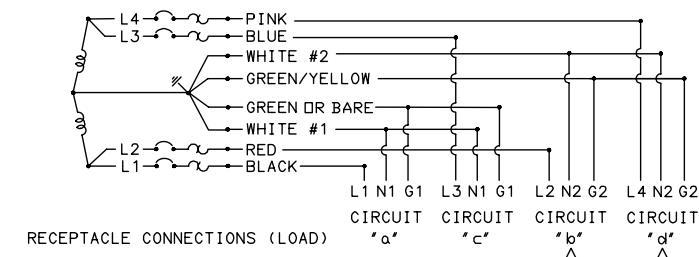

SYSTEM IS RATED FOR CONNECTION TO A MULTIPLE GROUNDED 120/280-V, 3-PH WYE, 60-HZ 20 AMP MULTIWIRED BRANCH CIRCUIT.

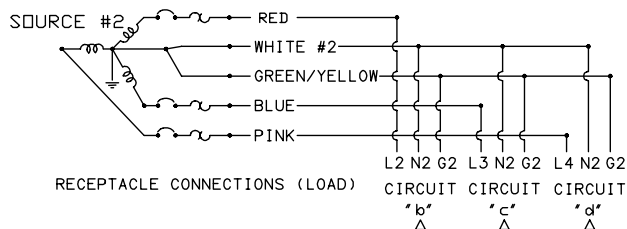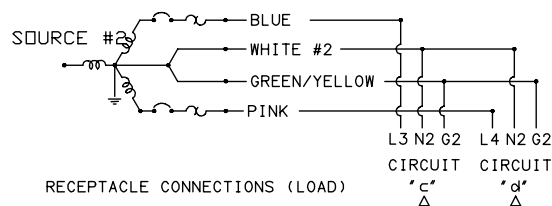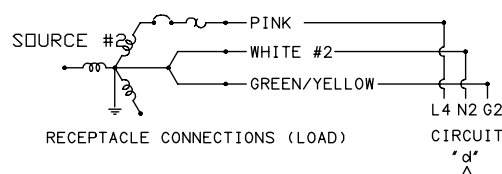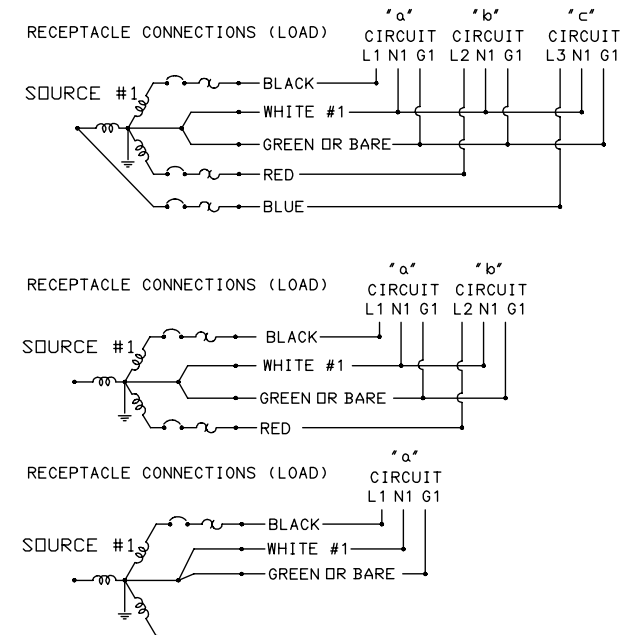

- NOTES:
1. N1 AND N2 ARE 10 GA CONNECTORS.
 2. GREEN/YELLOW CONDUCTOR CAN BE USED AS AN ISOLATED GROUND.


Assembly Instructions:

WARNING

Disconnect electrical power before installation.
Failure to do so can cause electrical shock and personal injury.


1

1. Loosen 4 Screws on Cover and remove.

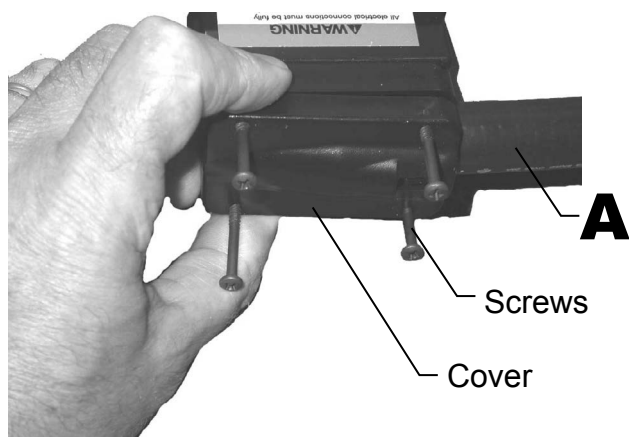

2

1. Feed open wire end of Power Entry Harness through Port Opening In Base Cover.

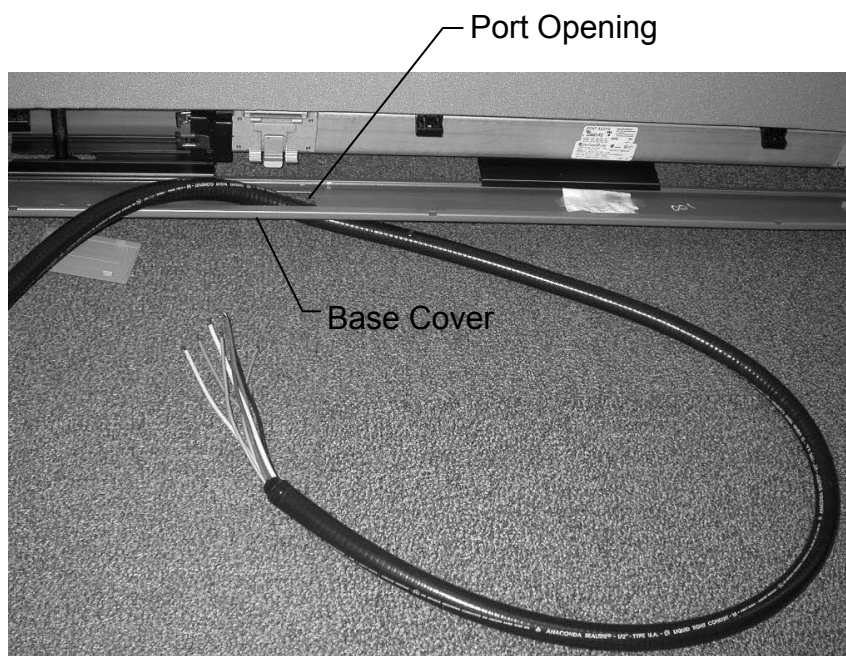




WARNING



All electrical connections must be fully engaged and locked.
Loose connections can cause fire and /or electrical shock.

3

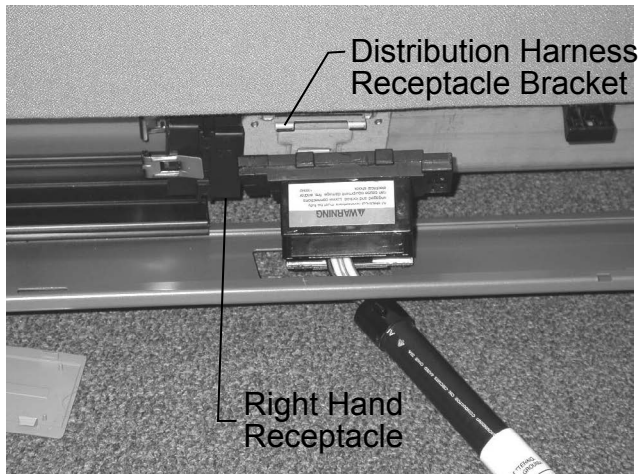

1. Place connector end of Power Entry Harness into a Receptacle Bracket of Distribution Harness.
2. Push into Receptacle. Make sure connection fully engages.

4

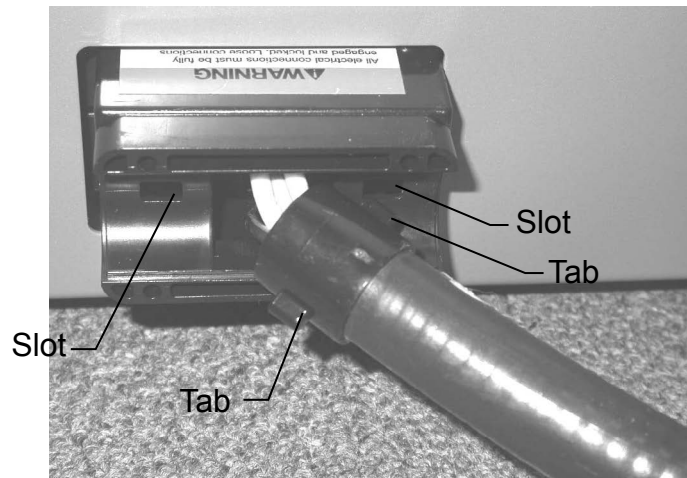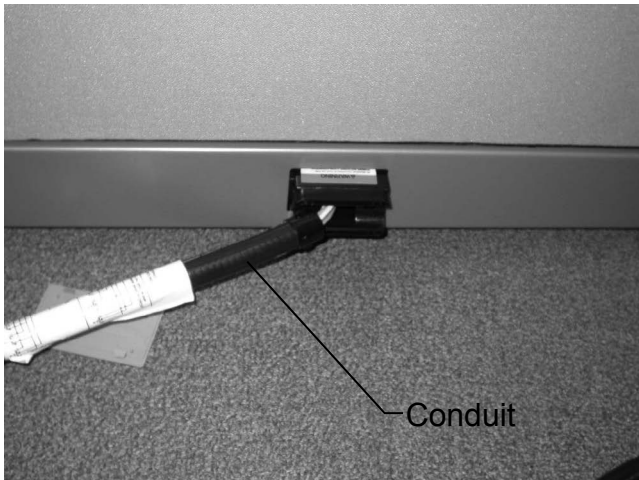

1. Close Base Cover.
2. Determine which direction Conduit will run.
3. Align Tab on Conduit end with Slot in Body.

HermanMiller

Part no. 1b2ghf rev E.


© 2017 Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.

© Herman Miller and Canvas Office Landscape are among the registered trademarks of Herman Miller, Inc.

Illustrations and specifications are based on the latest product information available at the time of publication.
The right is reserved to make changes in design and specifications at any time, without notice, and also to discontinue products.

5

1. Return Cover to Body.

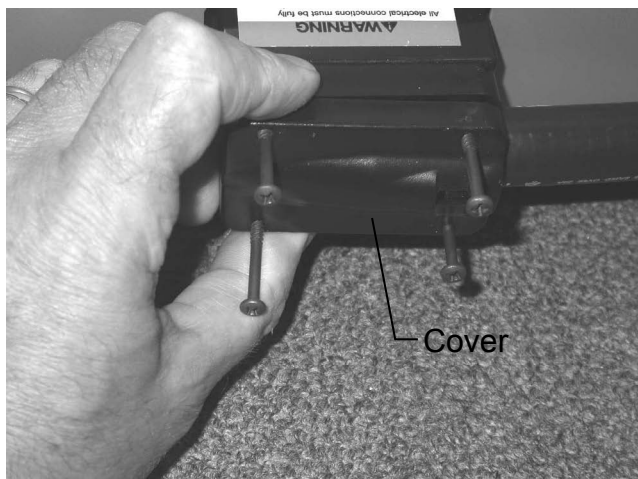

6

1. Hand tighten 4 Screws on Cover as shown
2. Hardwire open wire end of Harness into floor monument, perimeter wall or column outlet. (Conduit connector supplied by customer.)



Disassembly for Recycling:

Materials Identification and Segregation:

Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse the above installation steps.