


Aeron® Arm Pad Support Replacement

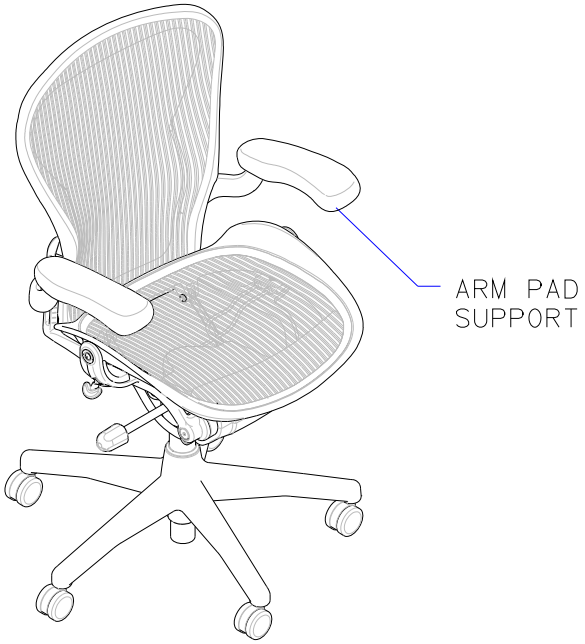


TOOLS NEEDED



#2 PHILLIPS HEAD SCREWDRIVER




TORQUE WRENCH




RATCHET WRENCH W/ 13MM SOCKET

PARTS INCLUDED

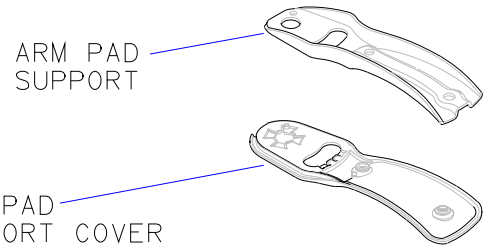

1 ARM PAD SUPPORT

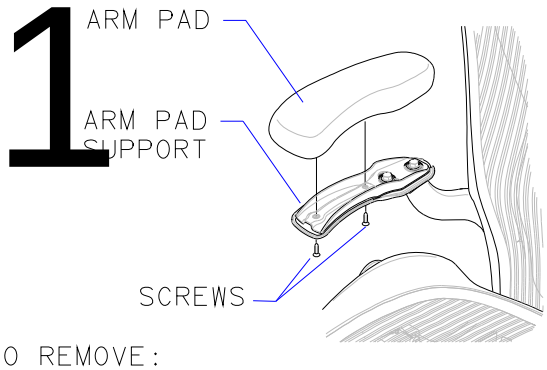


TO REMOVE:

1. USING #2 PHILLIPS HEAD SCREWDRIVER, REMOVE AND SET ASIDE (2) SCREWS FASTENING ARM PAD TO ARM PAD SUPPORT. PULL ARM PAD UP FROM ARM PAD SUPPORT. SET ARM PAD ASIDE.

TO REINSTALL:

1. PLACE ARM PAD ON ARM PAD SUPPORT. INSERT SCREWS IN ARM PAD SUPPORT AND SECURE ARM PAD USING #2 PHILLIPS HEAD SCREWDRIVER.

2 FIXED ARM PAD SUPPORT REPLACEMENT

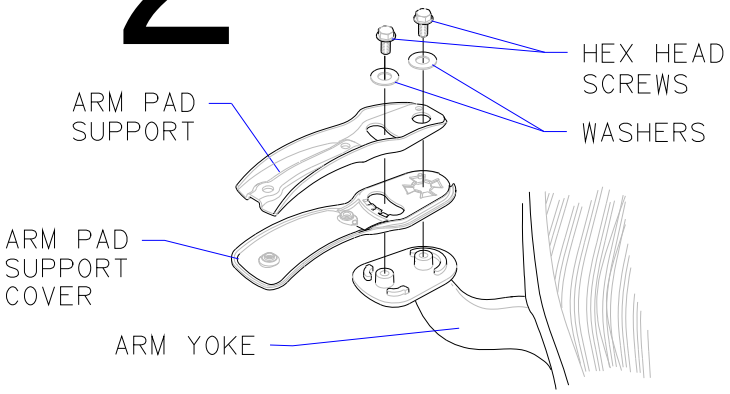

TO REMOVE:

1. USING 13MM SOCKET AND RATCHET WRENCH, REMOVE AND SET ASIDE HEX HEAD SCREWS WITH WASHERS, SECURING ARM PAD AND ARM SUPPORT COVER TO ARM YOKE. REMOVE AND PROPERLY DISPOSE OF ARM PAD SUPPORT AND ARM PAD SUPPORT COVER. NOTE: EARLIER VERSION WAS ONE PIECE ALUMINUM CASTING.

TO REINSTALL:

2. INSTALL REPLACEMENT ARM SUPPORT COVER AND ARM PAD SUPPORT TO ARM YOKE AND SECURE WITH HEX HEAD SCREWS AND WASHERS. TIGHTEN AND TORQUE TO 200-250 IN LBS, USING TORQUE WRENCH.


1BOF01 REV B

HermanMiller

© 2000 Herman Miller, Inc., Zeeland, Michigan Printed in U.S.A.
® Action Office, Aeron, Ambi,Arrio, Beirise Collection, Co/Struc, Custom Choices, Eames, Equa, Equa 2, Ergon 2, Ergon 3, Ethospace, E-wall Hollington, Liaison, Meridian, Newhouse Group, Passage, Pellicle, Phoenix, Proper, Radian, Relay, Scooter, Super Room, Systems Bridge, and V-wall are registered trademarks of Herman Miller, Inc.
™ HermanMiller, HermanMiller, , Caper, Burdick Group, Chadwick, Flex-Edge, Florence, ID, Kiva, Levity, Milafin, Potomac, Prospects, Q, Raleigh,
Reaction, Red, Resolve, SQA, and Traverse are trademarks of Herman Miller, Inc.
Illustrations and specifications are based on the latest product information available at the time of publication. The right is reserved to make changes in design and specifications at any time, without notice, and also to discontinue products.

Aeron® Arm Pad Support Replacement

3 ADJUSTABLE ARM PAD SUPPORT REPLACEMENT

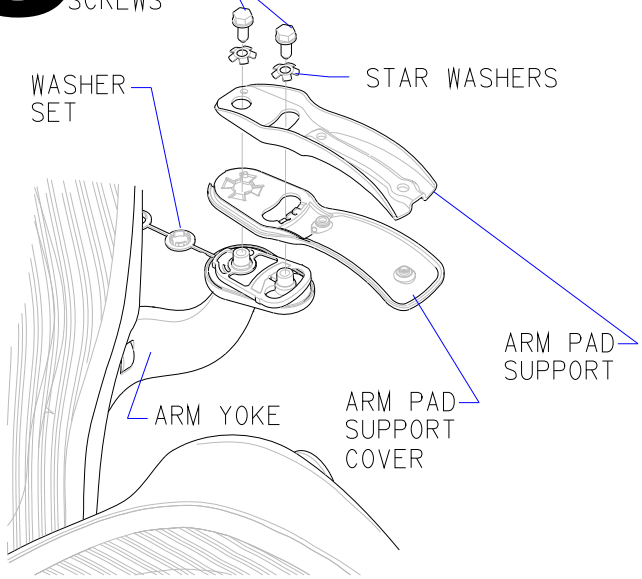

TO REMOVE:

1. USING 13MM SOCKET AND RATCHET WRENCH, REMOVE HEX HEAD SCREWS, STAR WASHERS AND WASHER SET FROM ARM YOKE, SECURING ARM PAD SUPPORT. REMOVE ARM PAD SUPPORT AND ARM PAD SUPPORT COVER FROM ARM YOKE AND DISPOSE OF PROPERLY. NOTE: EARLIER VERSION WAS ONE PIECE ALUMINUM CASTING.

TO REINSTALL:

1. PLACE REPLACEMENT ARM PAD SUPPORT COVER AND ARM PAD SUPPORT ON ARM YOKE. SWING OVER WASHER SET ON ARM PAD SUPPORT. REINSTALL STAR WASHERS AND HEX HEAD SCREWS. TIGHTEN AND TORQUE TO 200-250 IN LBS.

HermanMiller

© 2000 Herman Miller, Inc., Zeeland, Michigan Printed in U.S.A.
® Action Office, Aeron, Ambi,Arrio, Beirise Collection, Co/Struc, Custom Choices, Eames, Equa, Equa 2, Ergon 2, Ergon 3, Ethospace, E-wall Hollington, Liaison, Meridian, Newhouse Group, Passage, Pellicle, Phoenix, Proper, Radian, Relay, Scooter, Super Room, Systems Bridge, and V-wall are registered trademarks of Herman Miller, Inc.
™ HermanMiller, HermanMiller, , Caper, Burdick Group, Chadwick, Flex-Edge, Florence, ID, Kiva, Levity, Milafin, Potomac, Prospects, Q, Raleigh, Reaction, Red, Resolve, SQA, and Traverse are trademarks of Herman Miller, Inc.
Illustrations and specifications are based on the latest product information available at the time of publication. The right is reserved to make changes in design and specifications at any time, without notice, and also to discontinue products.