HermanMiller

New Aeron® Cylinder Replacement

Parts Included




Cylinder

How to replace your Cylinder

Tools Required



Nylon Cap




2# - 3# Plastic Covered Dead Blow Hammer



Lift Off Tool


Step 1

1.1 Lay chair on the side.

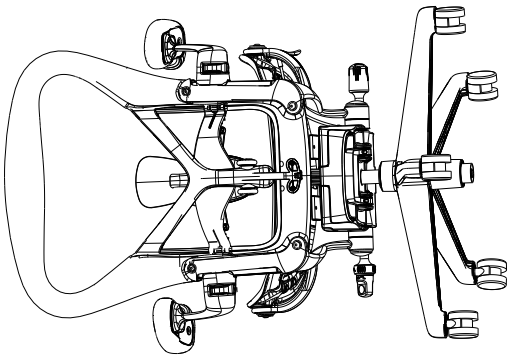


Step 2

2.1 Place the nylon cap at the bottom of the cylinder. Using a dead blow hammer hit the bottom of the base.

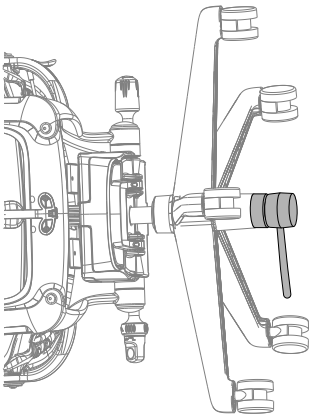


Step 3

3.1 Remove base from the cylinder.

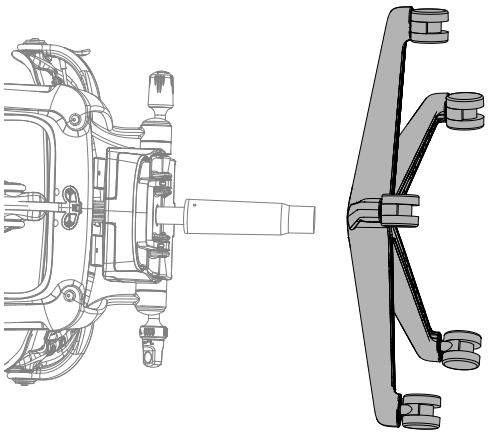


Step 4

4.1 Place the lift off tool on the cylinder.

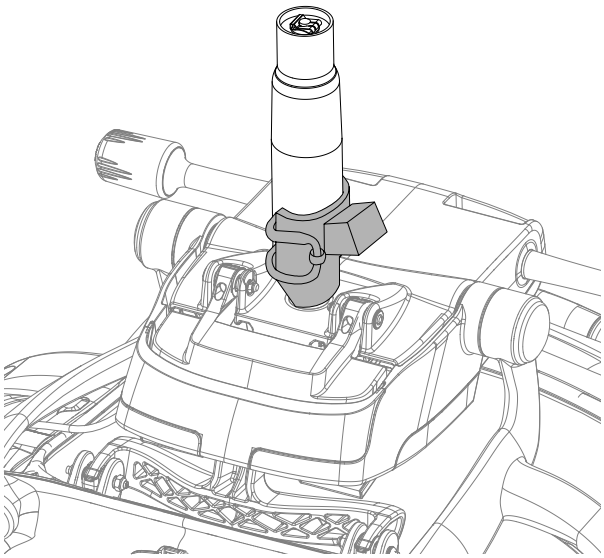


Step 5

5.1 Strike the lift off tool with the dead blow hammer back and forth on the both sides until gas cylinder separates from the tilt.

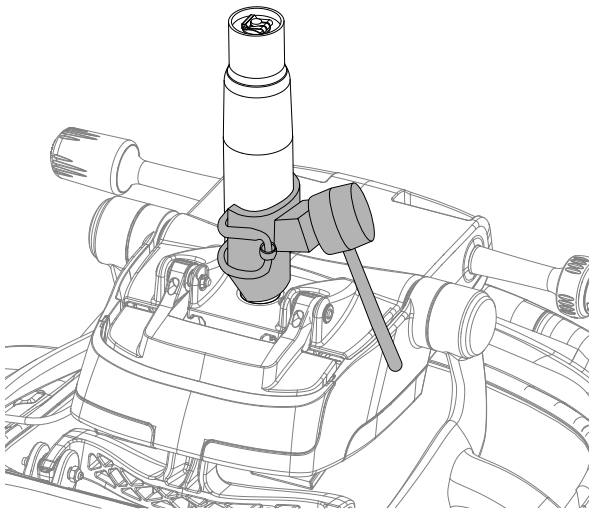

Step 6


6.1 Remove the cylinder from the base.

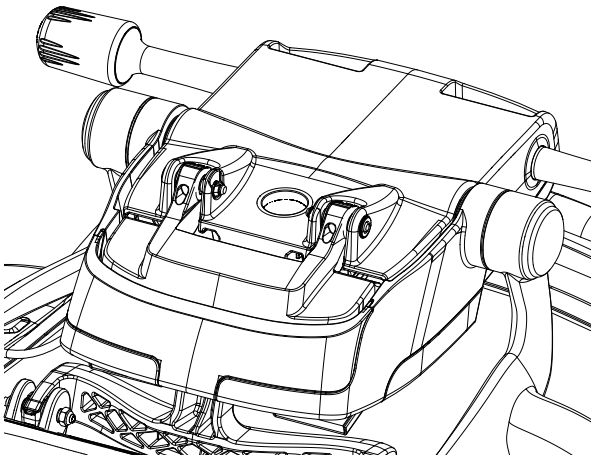

Re-Assembly Steps:


Step 7

7.1 Install the new cylinder onto the base.

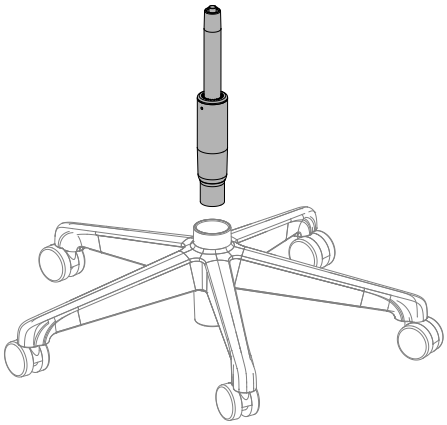

Step 8

8.1 Extend chair arms in upright position. Grab the arm stems and lower upper seat assembly onto top of the cylinder.

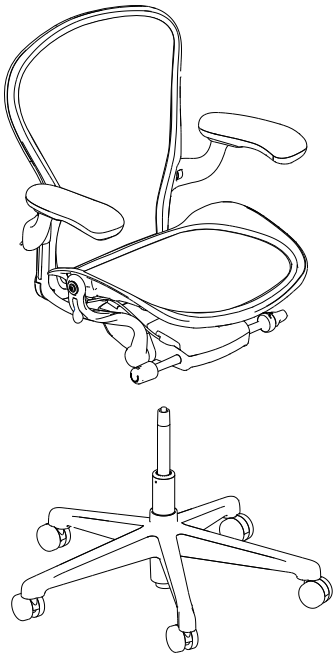

Step 9

9.1 Sit on the chair firmly several times to set cylinder and base.

