


Table of Content

1. Post Leg Installation ('P' option)	2
2. T & C - Leg Installation (T & C options)	4
3. T & C - Adjustable Leg Installation (A + D option)	7
4. Flip Top Leg & Assembly Installation (DT5A Product)	10
5. 4X Leg Installation (X - option)	14
6. Single Column Leg Installation (S option)	17
7. Y3 Leg Installation (E option)	21
8. Y2 Leg Installation (G option)	24
9. Byrne Interlink	27
10. Extended Meeting Table	28






Parts Included:

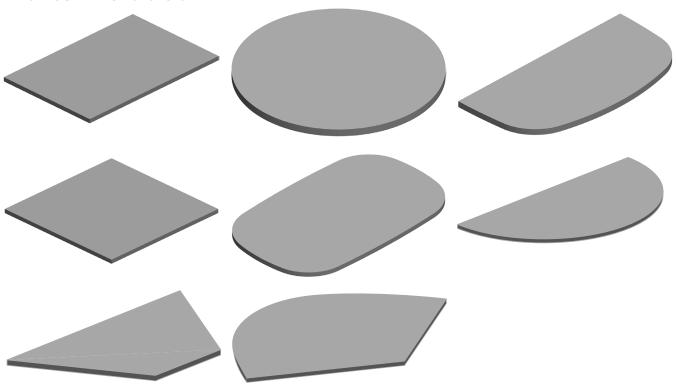


A Work Surface Options

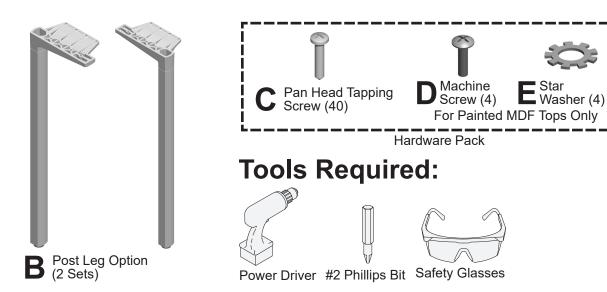

^{© 2023} Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.

TM **① . ① Herman Miller**, Everywhere Tables are among the trademarks of Herman Miller, Inc.

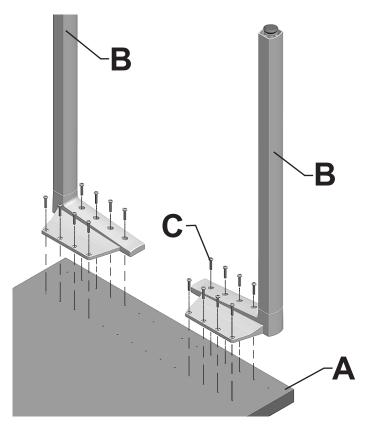

- 1. Align Holes in Post Legs (B) with outermost holes in Work Surface (A).
- 2. Install 8 Pan Head Tapping Screws (C) per Leg (HPL + Veneer) or 7 pan head Screws per leg (C) (Painted MDF).
- 3. For use on 'painted MDF tops' use (D)+(E) in locations where an insert is present in the hole pattern.

Disassembly for Recycling:

Materials Identification and Segregation:


Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse steps 3 through 1.

Part no. 1b6k0d rev H




Everywhere Tables™ T & C Leg Installation (T & C options) and Disassembly for Recycling Instructions

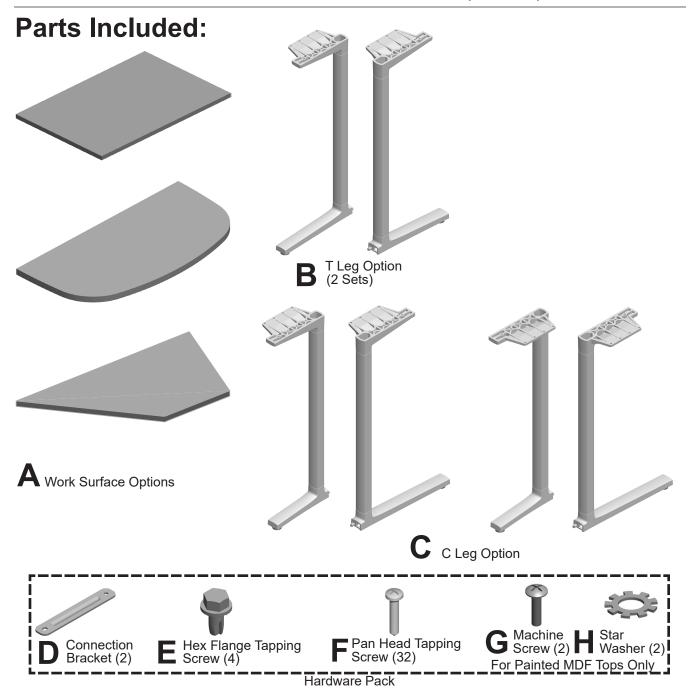

Tools Required:




Part no. 1b6k0d rev H **HermanMiller**

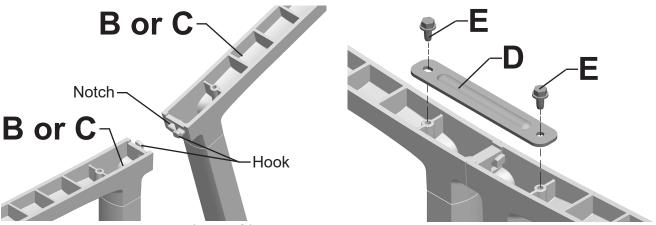


- 1. Hold Leg segments (B or C) at 15 degree angle to one another.
- 2. Insert Hooks on base of leg segments into notches in adjoining leg segments.
- 3. Secure Leg segments together with Connection Bracket (D) and 2 Hex Flange Tapping Screws (E). (Per Leg) Do not overtighten.

 "T" Leg

 "C" Leg

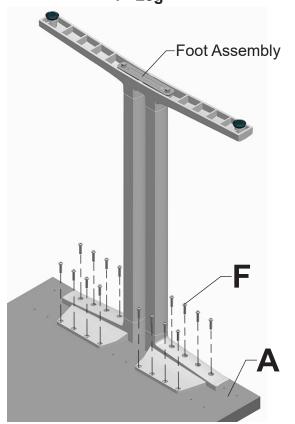

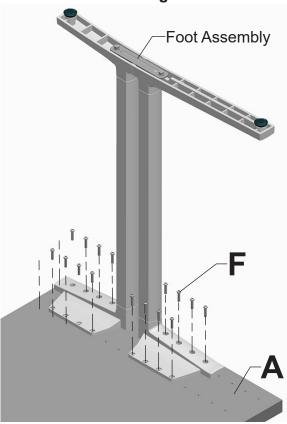

- 4. Position Leg Assembly at each end on bottom side of Work Surface (A) so that Foot Assembly is centered on depth of Work Surface.
- 5. Install Pan head tapping screws (F) 16 per Leg Assembly. Exception on painted MDF tops, use machine screw (G) and star washer (H) in locations where insert is present in the hole pattern.

Materials Identification and Segregation:


Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.


To disassemble product, reverse steps 5 through 1.



Everywhere Tables™ Adjustable Leg Table Installation (A + D options) and Disassembly for Recycling Instructions

Parts Included:

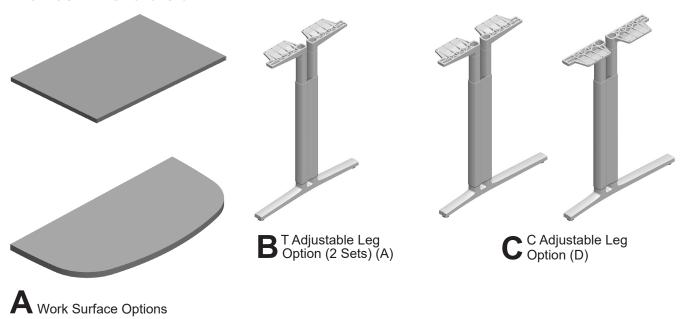



Hardware Pack

Tools Required:











Power Driver #2

#2 Phillips Bit


Ratchet Wrench 3/8" Socket


Safety Glasses

HermanMiller


Part no. 1b6k0d rev H

Adjustable Leg Installation:

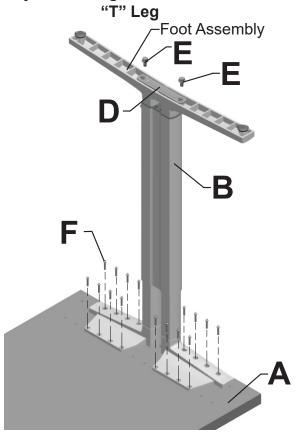

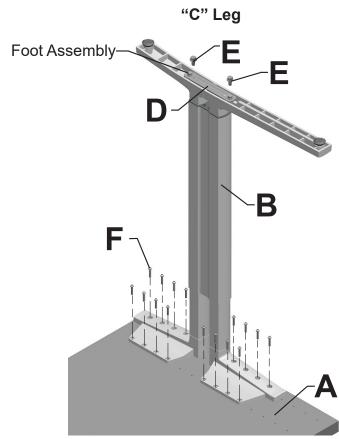

- 1. Secure leg segments together with connecting bracket (D) and 2 Hex Flange tapping screws (E) (per leg assembly).
- 2. Position Leg Assembly at each end on bottom side of Work Surface (A) so that Foot Assembly is centered on depth of Work Surface.
- 3. Install Pan head tapping screws (16) per leg assembly. Exception painted MDF tops. Use machine screw(G) and star washer (H) in locations where insert is present in the hole pattern.



- 4. To Adjust work surface height, support work surface then push down on button on Legs.
- 5. Raise or lower work surface to desired height.

Part no. 1b6k0d rev H

The right is reserved to make changes in design and specifications at any time, without notice, and also to discontinue products.


Materials Identification and Segregation:


Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.


To disassemble product, reverse steps 5 through 1.




Parts Included:

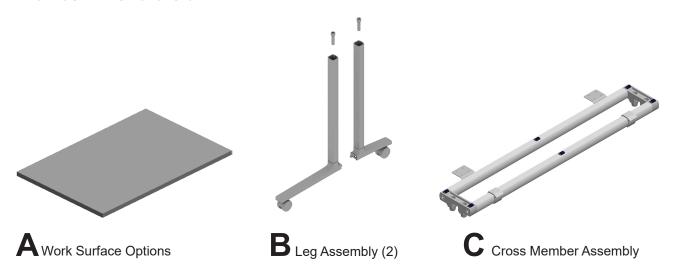




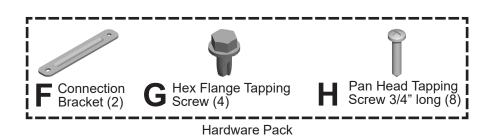


Tools Required:



^{© 2023} Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.

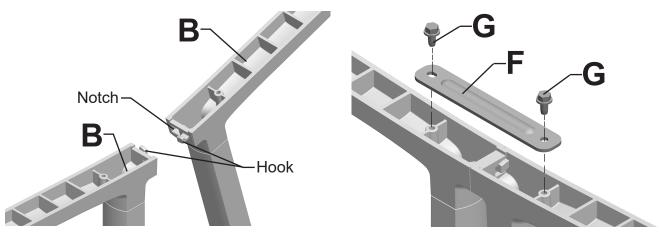


- 1. If legs have casters, use 1-locking caster and 1-non locking caster per leg assyembly.
- 2. Hold Leg segments (B) at 15 degree angle to one another.
- 3. Insert Hooks on base of leg segments into notches in adjoining leg segments.
- 4. Secure Leg segments together with Connection Bracket (F) and 2 Hex Flange Tapping Screws (G). Do not over tighten.

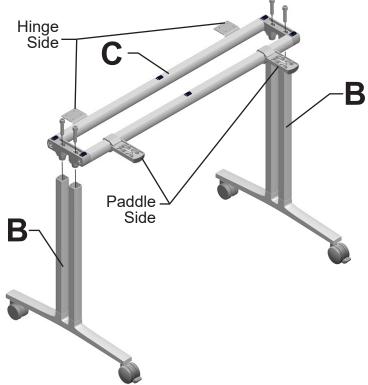


- Note: Locking Casters to be on Paddle side. 5. Remove pre-assembled T-50 Torx head screws from top of the Legs (hold for Assembly).
- 6. Insert Leg Assemblies (B) into Cross Member Assembly (C).
- 7. Secure Legs to Cross Member with T-50 torx head screws.

Part no. 1b6k0d rev H

The right is reserved to make changes in design and specifications at any time, without notice, and also to discontinue products.

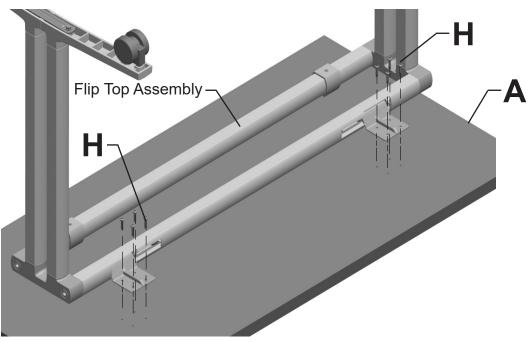

- 8. Position Flip Top Assembly onto Work Surface (A). 9. Install 8 Pan Head Tapping Screws 3/4" long (H).

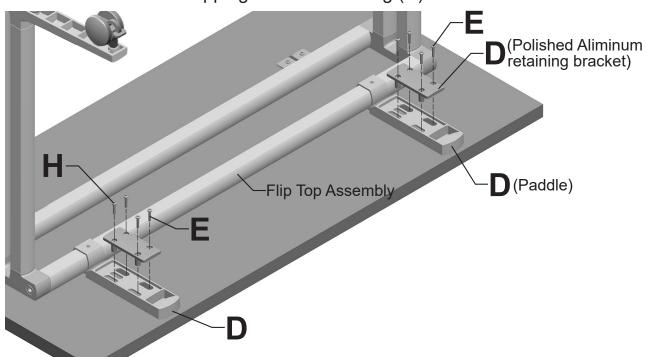

- 10. Position Paddles (D) up against Collars on Cross Members.
 11. Pull back polished Aluminium retaining bracket to Align predrilled pilot holes.
 12. Install 8-1 1/2" long Pan Head Tapping screws (E) (part of paddle kit).

Part no. 1b6k0d rev H **HermanMiller**


Materials Identification and Segregation:

Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.


To disassemble product, reverse steps 12 through 1 and remove the casters.



Parts Included:

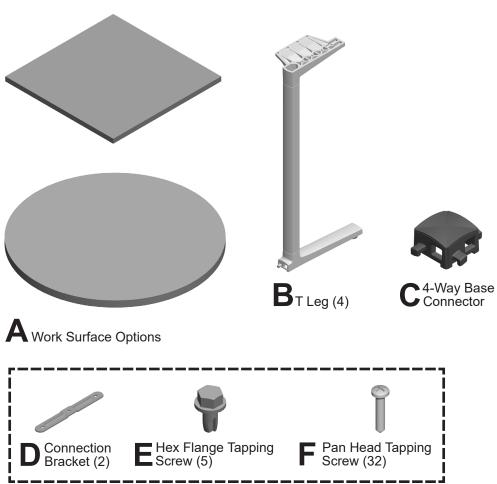


Tools Required:




^{© 2023} Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.

• • • • Herman Miller, Everywhere Tables are among the trademarks of Herman Miller, Inc.

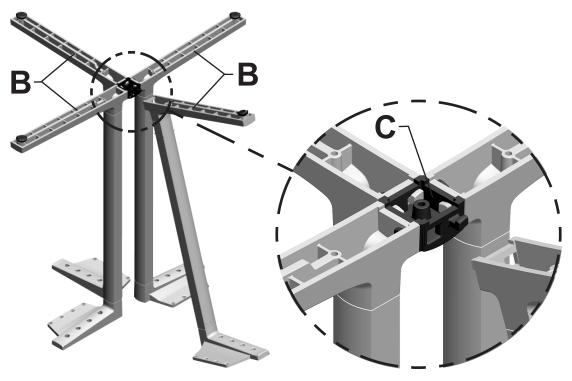

- Hold Leg segments(B) at 15 degree angle.
 Interlock Leg Bases onto Base Connector(C).

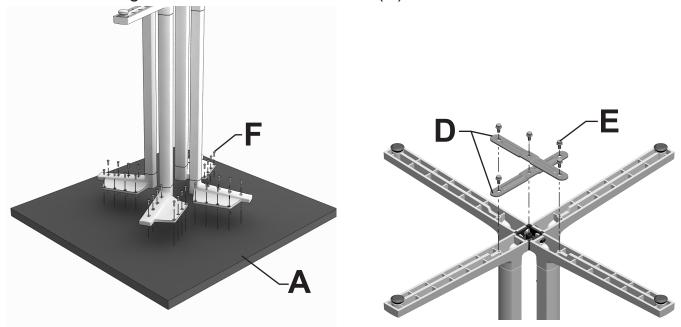

- Position Leg Assembly onto bottom of Table Top(A).
 Install 8 screws(F) per Leg.
 Tie Legs together with 2 Leg Brackets(D) and 5 Hex Flange Screws(E). Do not overtighten.

Part no. 1b6k0d rev H **HermanMiller**

Illustrations and specifications are based on the latest product information available at the time of publication.

Materials Identification and Segregation:


Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse steps 5 through 1.



Everywhere Tables™ Single Column Base (S) Installation and Disassembly for Recycling Instructions

Parts Included:

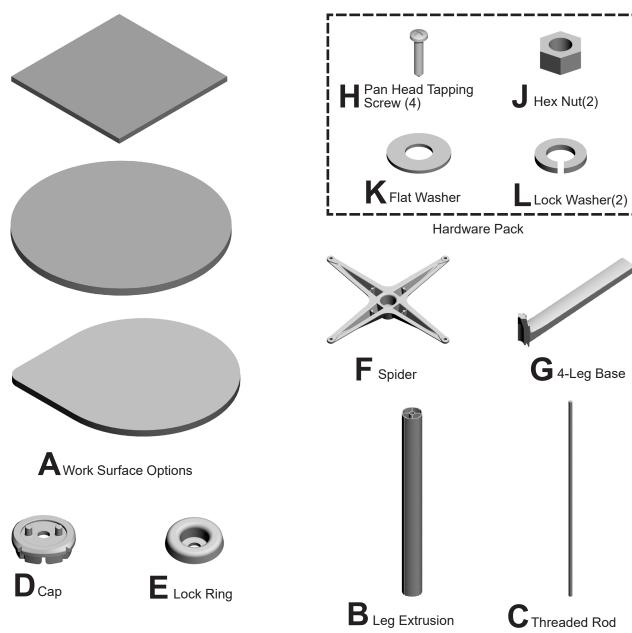

Tools Required:













Power Driver

Ratchet Wrench

#2 Phillips Bit


3/8" Socket T-50 Torx Driver


Safety Glasses

HermanMiller


Part no. 1b6k0d rev H

^{© 2023} Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.







- 1. Assemble 4-leg base(G) together.
- 2. 4 Leg Bases(G) fit into Leg Extrusion(B).

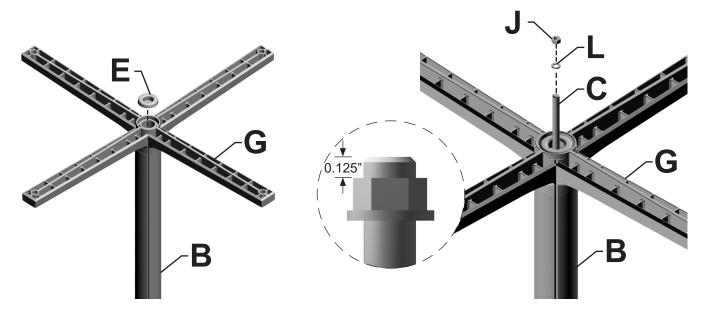

- 3. Assemble Lock Ring(E) to bottom of Leg base(G).
- 4. Insert Threaded Rod(C) with Lock Washer(L) & Hex Nut(J) at bottom of Leg Base(G).

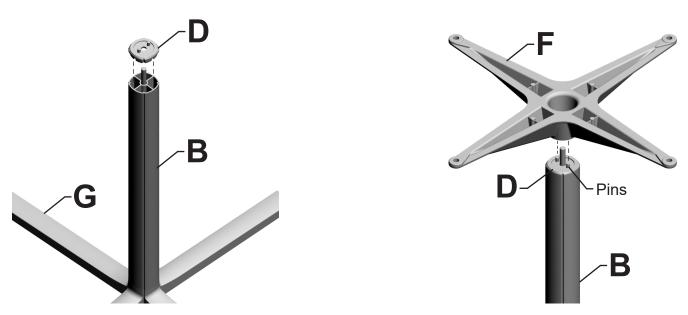

- 5. Assemble Cap(D) on top of Leg Extrusion(N).
- 6. Place Spider(F) on top of Cap(D). Make sure pins are in holes in Spider(F).

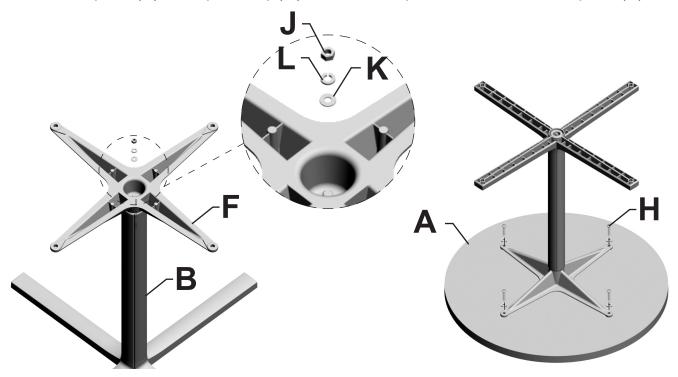

- 7. Place Flat Washer(K), Lock Washer(L) and Hex Nut(J) to top of Threaded Rod(C). Tighten.
- 8. Using Pan Head screw(H) assemble Work Surface(A) with Leg Base assembly.

Materials Identification and Segregation:


Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.


To disassemble product, reverse steps 8 through 1.



Everywhere Tables™ Y3 Leg Installation (E-option) Installation and Disassembly for Recycling Instructions

Parts Included:

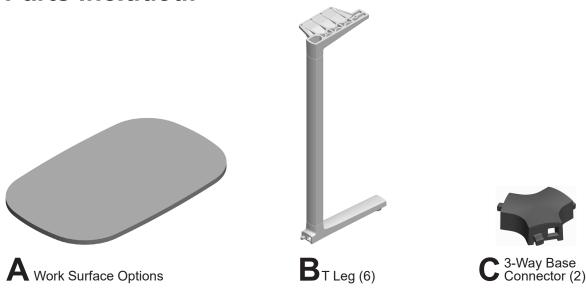

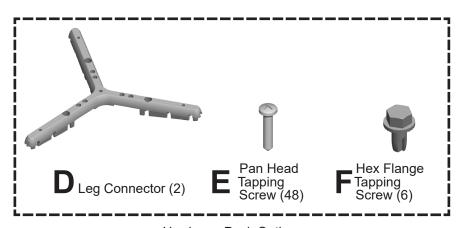

Hardware Pack Options

Tools Required:













Power Driver Ratchet Wrench #2 Phillips Bit 3/8" Socket

Safety Glasses

Part no. 1b6k0d rev H **HermanMiller**

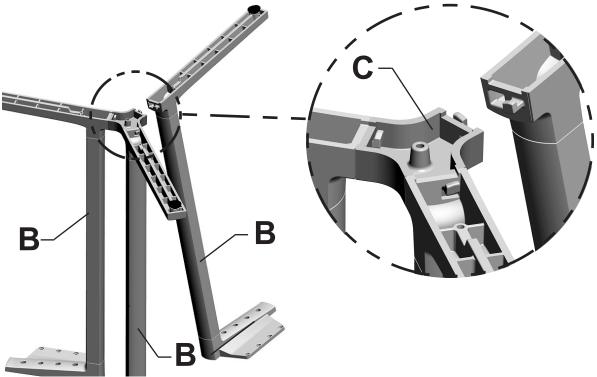

Hold Leg segments(B) at 15 degree angle.
 Interlock Leg Bases onto Base Connector(C).

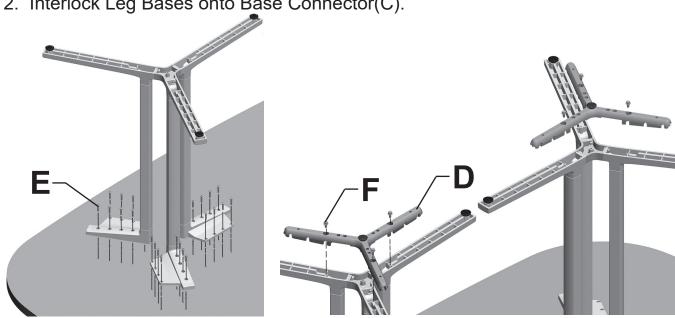

- 3. Position Leg Assembly onto bottom side of Work Surface(A)
- 4. Install 24 Pan Head Tapping Screws(E) per leg assembly.
- 5. Position Y Brace(D) onto Leg Assemblies.
- 6. Install 3 Hex Flange Screws(F) per Leg Assembly. Do not overtighten.
- 7. When in use position, ensure all 8 glides are in contact with the floor.


Materials Identification and Segregation:

Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.


To disassemble product, reverse steps 7 through 1.



Parts Included:

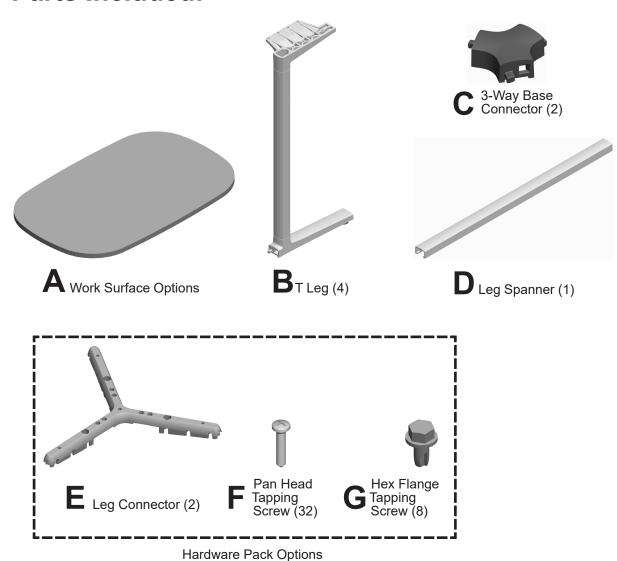


Tools Required:



- 1. Hold Leg segments (B) at 15 degree angle.
- 2. Interlock Leg Bases onto base connector(C).



3. Assemble Leg Connectors onto bottom of Leg Assemblies with 2 Hex Flange Tapping Screws(G) per leg.

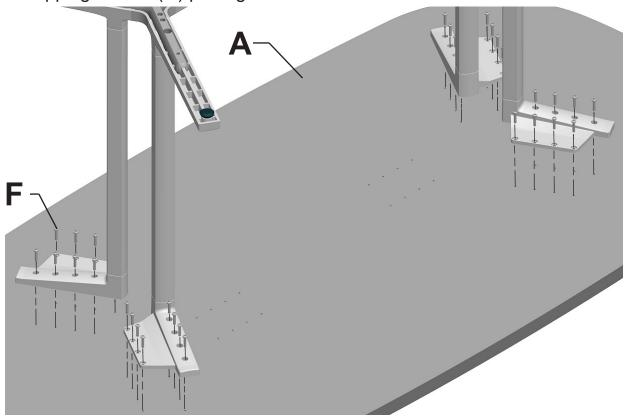

4. Install Leg Assemblies onto Work Surface(A) with 32 Tapping Screws(F).


HermanMiller

Part no. 1b6k0d rev H

Illustrations and specifications are based on the latest product information available at the time of publication.

^{© 2023} Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.

[•] O, OHermanMiller, Everywhere Tables are among the trademarks of Herman Miller, Inc.

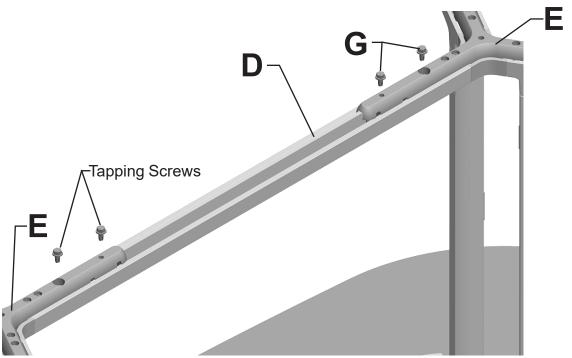


5. Attach spanner (D) to the two leg connectors (E), use 4 Hex flange tapping screws (G). Do not overtighten

Materials Identification and Segregation:

Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.


To disassemble product, reverse steps 5 through 1.

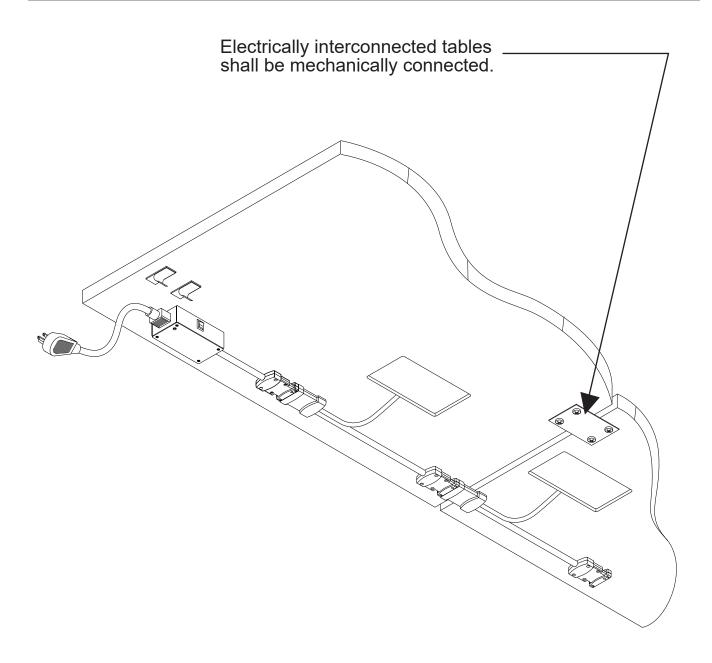




Everywhere Soft Rectangle - Extended Meeting Table Installation and Disassembly for Recycling Instructions

Parts Included:

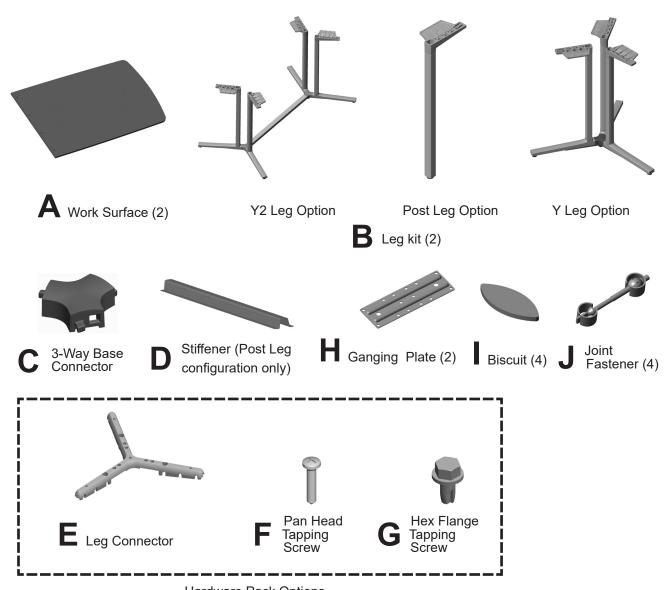


Hardware Pack Options

Tools Required:




[•] MermanMiller, Everywhere Tables are among the trademarks of Herman Miller, Inc.


Step 1: Lay work surfaces (A) upside down on a soft surface to prevent scratching.

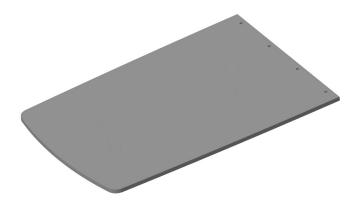


Step 2: Assemble legs using instructions specified in this document. The leg configuration can be determined based on the images below:

Y2 Leg Option

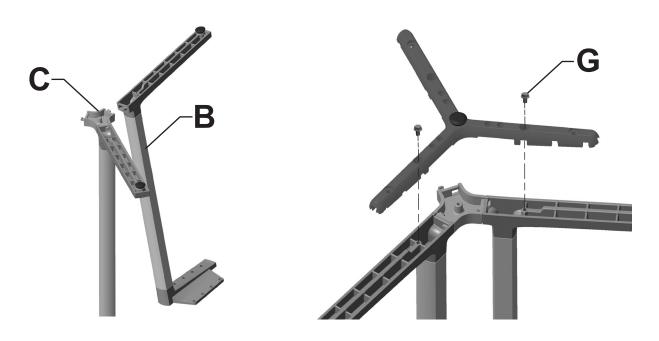

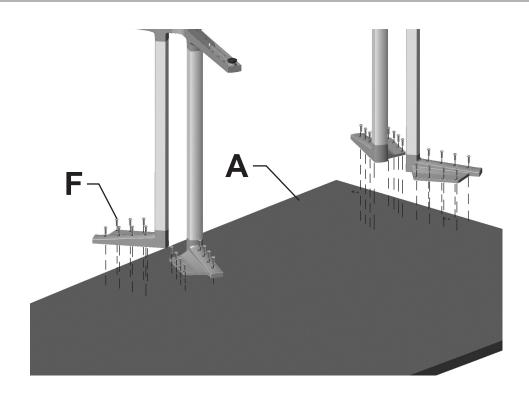

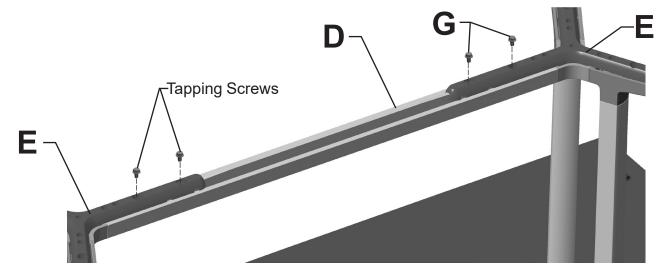

Y3 Leg Option

Step 3: Locate the predrilled holes for leg configuration and attach the leg assemblies to the work surface using the included hardware


Part no. 1b6k0d rev H **HermanMiller**

^{© 2023} Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.

•• • • • • Herman Miller, Everywhere Tables are among the trademarks of Herman Miller, Inc.

Step 4: Carefully flip each table onto its feet. Align each joint edge. Attach joint connectors using a small allen wrench to tighten until the joint is gap free. Attach the ganging plate in the pre-drilled holes in the work surface.



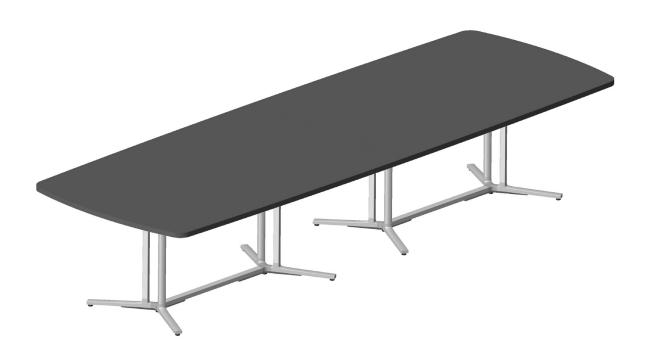

Materials Identification and Segregation:

Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse steps 4 through 1.