

# HermanMiller The Collection Nelson™ Bench Installation



## How to assemble your bench.

For more information about our products and services or to see a list of dealers, please visit us at [hermanmiller.com](http://hermanmiller.com) or call (800) 851 1196.

© 2013 Herman Miller, Inc., Zeeland, Michigan Printed in U.S.A. Part No. 1b9l4t - D.


TM Nelson are among the trademarks of Herman Miller, Inc.

### Tools required




#2 Phillips Screwdriver

### Parts Included

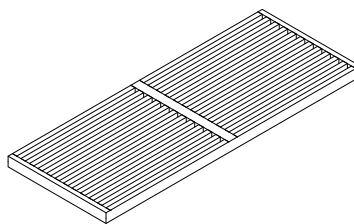

**A** Bench Assembly

### B Leg Hardware

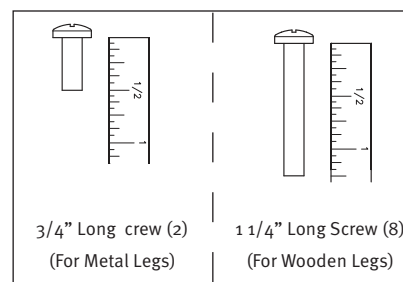

### Warning:


*Failure to fully tighten screws may cause injury by causing bench to collapse. Tighten screws until they stop plus a quarter turn.*

### Step 1 (Metal Base version shown)

1.1 Lay bench assembly (A) top side down on a clean surface.


1.2 Pivot leg assemblies up.

1.3 Align holes in V brackets to holes in bench slats and insert screws (B) into each leg assembly. Tighten screws.

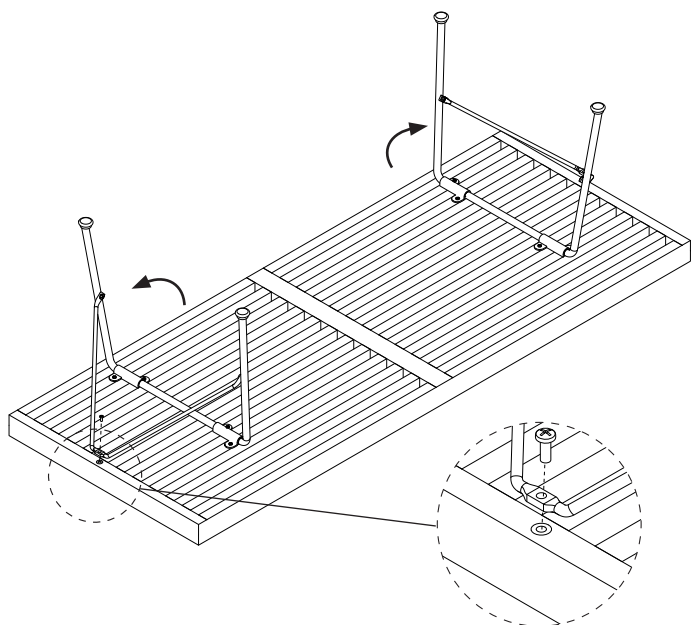

### Step 2

2.1 Place table in upright position.

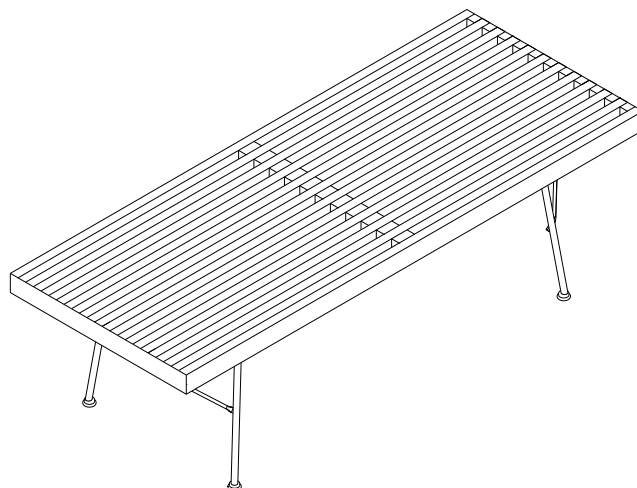


## Step 1 (Wood Base version shown)

1.1 Lay bench assembly (A) top side down on a clean surface.

1.2 Place legs onto bench and align holes.

1.3 Insert screws (B) into each leg assembly.


Tighten screw.

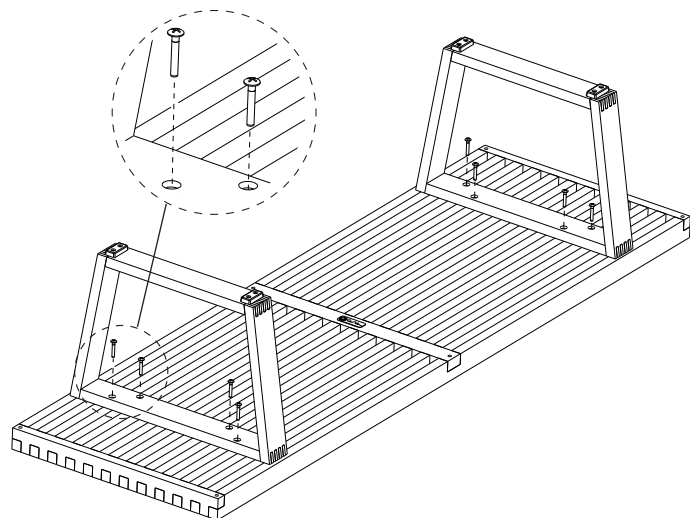

## Step 2

### 2.1

Place table in upright position.

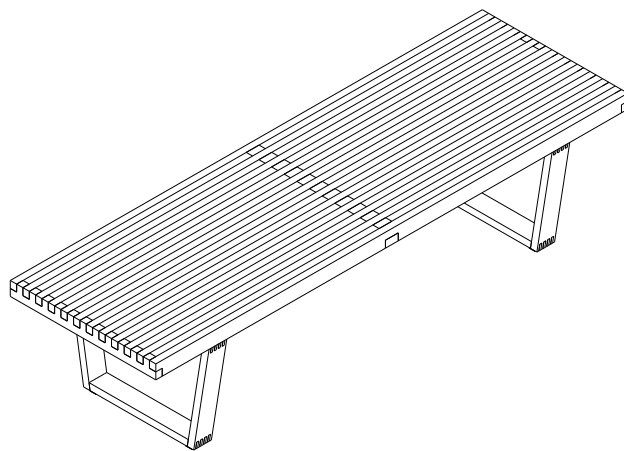

## Finishes Care and Maintenance

With regular care and maintenance, your HermanMiller furniture will provide years of superior performance and satisfaction. To maintain the finish quality of your HermanMiller product, please follow the cleaning procedures provided below.

### Wood

#### Normal Cleaning

Dust furniture with a slightly damp soft lint-free cloth.

Wipe dry with a dry soft cloth in the direction of the wood grain.

#### Once a month

Clean the surface with a soft cloth dampened with a quality cleaner formulated for wood furniture.

Wipe the surface in the direction of the wood grain to remove dirt and fingerprints.

Wipe dry with a clean dry cloth.

#### Twice a year

Apply a good quality furniture polish with a clean, soft cloth.

Do not use aerosol-powered cleaners or polishes.

Also, do not use polishes containing waxes or abrasives, or polishes that are oil based.

#### Minor repair of water rings, stains and scratches

Rub the surface lightly in the direction of the wood grain using No.0000 steel wool.

Apply a scratch-removing polish with a color and value that simulates the veneer.

If the scratches are deep, consult a professional furniture refinisher.

## Polished chrome, Trivalent chrome

### Normal Cleaning

Wet cheesecloth in a nonabrasive cleaner, like liquid dish soap, and rub the chrome component lightly until the original luster reappears.

Dry the component with a clean soft cloth to remove any soap residue.



## Warning:

*Failure to properly inspect and service this bench may lead to personal injury or product damage. Inspect the bench annually for damaged or broken parts and tighten or replace loose or missing fasteners.*