

HermanMiller

MN230 Performance Wall Anchor Bracket Installation and Disassembly for Recycling Instructions



How to assemble MN230 Performance Wall Anchor Bracket

Tools Required




Impact Driver




5mm Allen Wrench

Step 1

1.1 Install the first bracket around the glides.

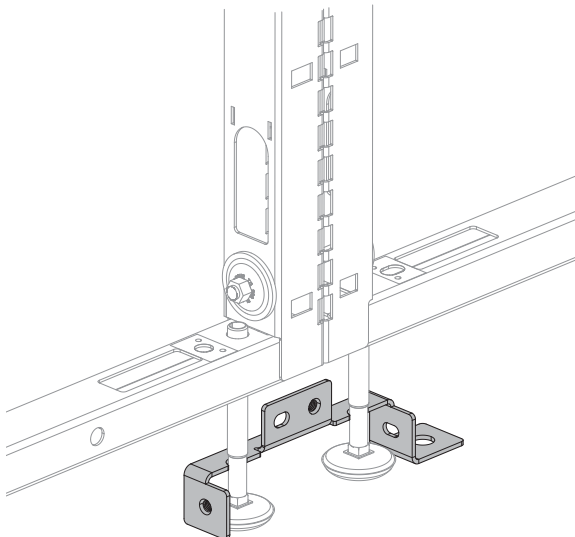

Parts Included




(2x) Anchor Brackets




(4x) M8x16 Button
Head Screw


1.2 Install the second bracket around the glides, so that it interlocks with the first bracket.

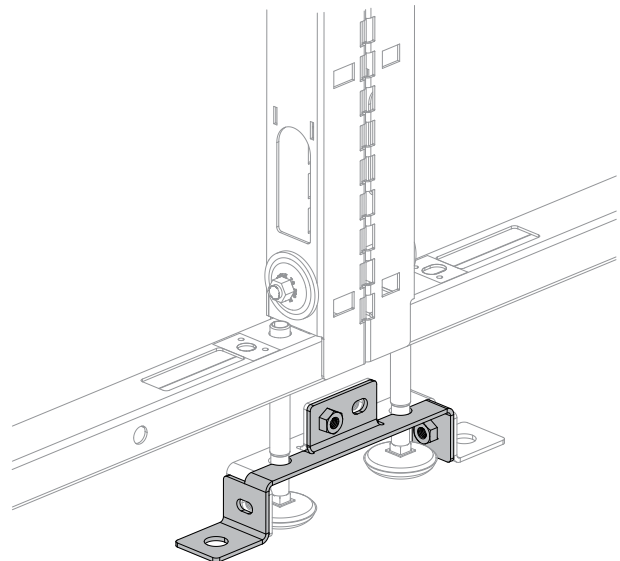

1.3 Using the Allen wrench, install the button head screws so that the two brackets are held tightly together.

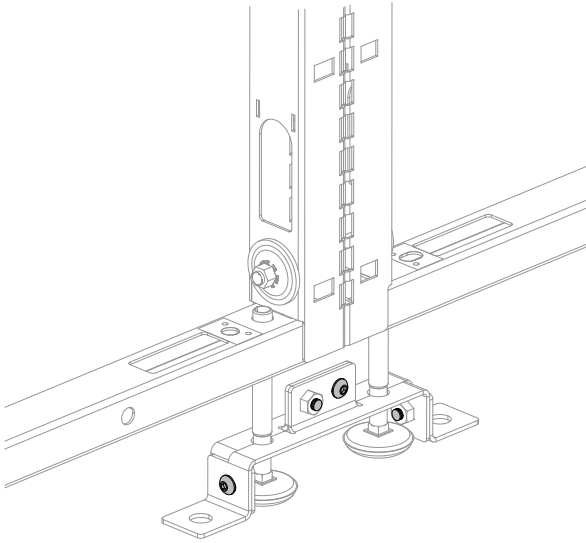

1.4 Install floor anchors according to the anchor manufacturer's instructions.

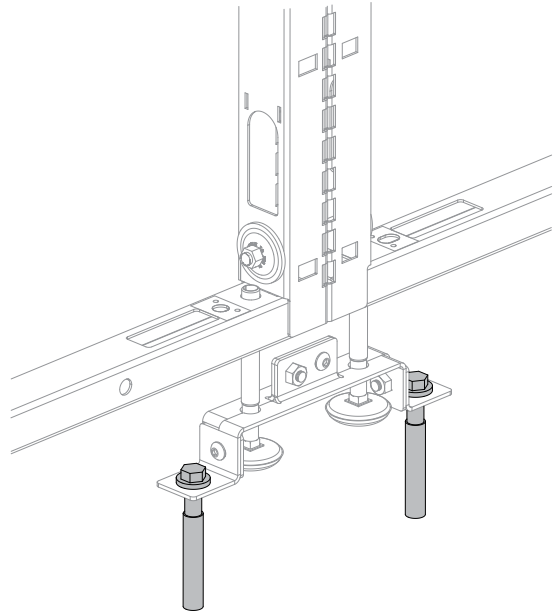

Disassembly for Recycling:

Materials Identification and Segregation:

Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse steps.

For more information about our products and services please visit us at hermanmiller.com or call (800) 851 1196.

©2018 Herman Miller, Inc., Zeeland, Michigan Printed in U.S.A. Part No. **1BNW98 – A**