
HermanMiller

Fuld Disassembly for Recycling Instructions




How to Disassemble your Fuld chair

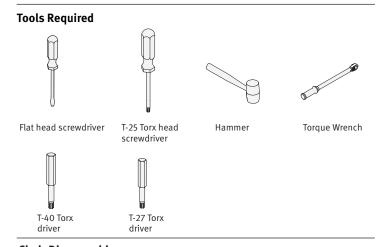

Chair Disassembly


Step 1

- 1.1 Remove bolts from underside of rear legs.
- 1.2 Remove backrest from remaining chair.

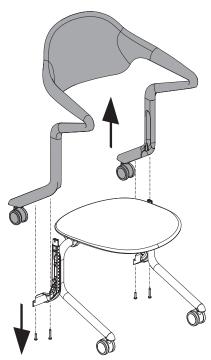


Step 2

- ${\tt 2.1}$ Remove bolts from LH-Leg insert and RH-leg insert.
- 2.2 Remove LH-Leg insert and RH-leg insert from Bent Tube.




HermanMiller Fuld chair 1 1BWJ6Hrev A Installation Instructions

3.1 Remove caster from old caster foot .

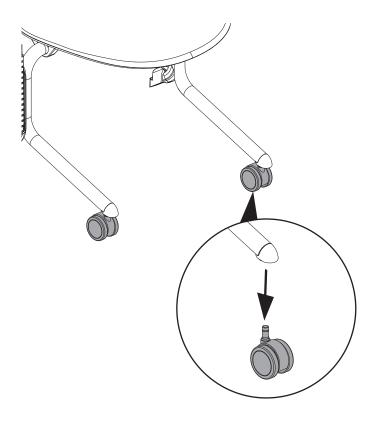


Step 55.1 Use flat head screwdriver to remove Clip Cover Retain for later.




Step 4

4.1 Using a non-marring hammer, gently tap rear surface of caster foot until it comes free from leg tube.

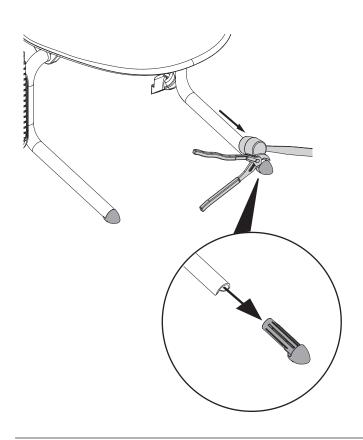


Step 6

- 6.1 Use T25 screwdriver to remove bolts.
- $6.2\ Remove\ U\text{-clip}.\ Retain\ for\ later.$




7.1 Remove seat from tube.



Step 8


8.1 Remove dampener from Seat. Retain for later.



Glide Chair Disassembly


Step 1

- 1.1 Remove bolts from underside of rear legs.
- 1.2 Remove backrest from remaining chair.

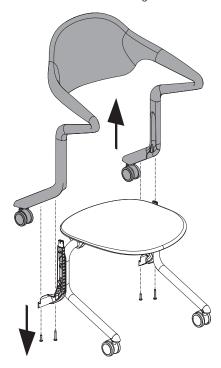


Step 2

- $2.1\ \mbox{Remove}$ bolts from LH-Leg insert and RH-leg insert.
- $2.2\ \text{Remove LH-Leg}$ insert and RH-leg insert from Bent Tube.




3.1 Using a non-marring hammer, gently tap rear surface of Front Glide Assembly until it comes free from leg tube.




Step 4

4.1 Pull down on Rear Glide Assembly until free from Backrest.




Step 5

 $5.1\ Use\ flat\ head\ screwdriver\ to\ remove\ Clip\ Cover\ Retain\ for\ later.$




Step 6

- $6.1\ Use\ T25\ screwdriver$ to remove bolts.
- 6.2 Remove U-clip. Retain for later.



7.1 Remove seat from tube.



Step 8

8.1 Remove dampener from Seat. Retain for later.

